


### Mounting example

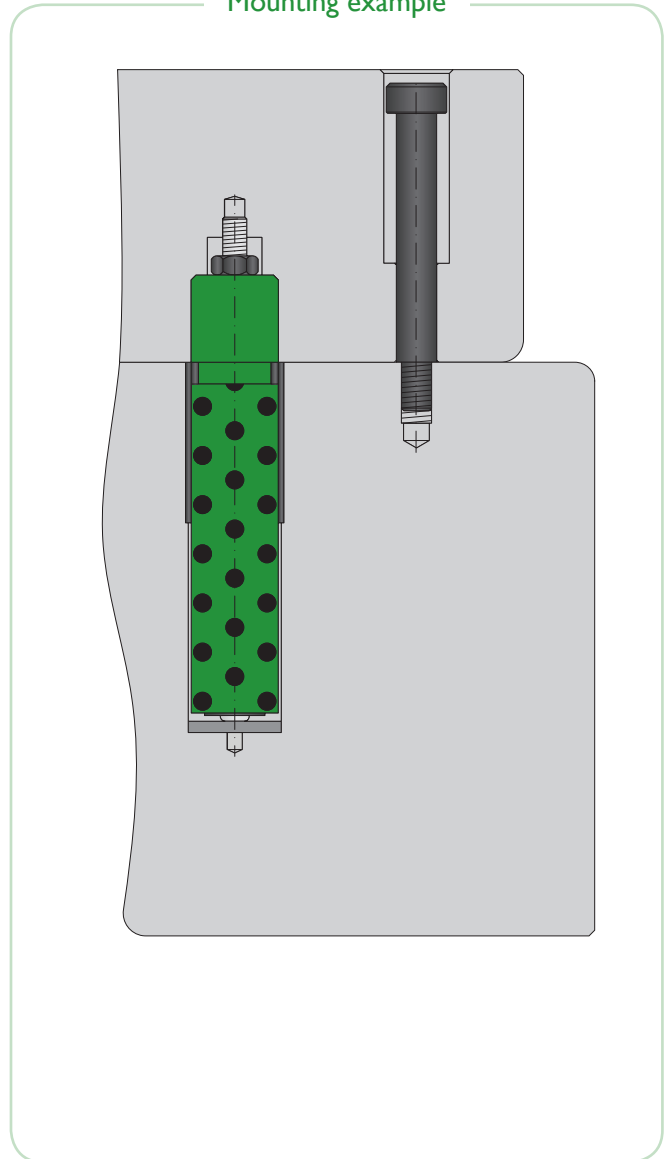

Ordering example: 4 x EL-5

Order No.	S <sup>(1)</sup> mm	L mm	A mm	F <sub>0</sub> <sup>(2)</sup> daN	F daN	P (20°C) bar	Gas Spring	Colour
EL-1	50	257	147	50	70	45	G-200-50	Green
EL-2	50	257	147	100	140	90	G-200-50	Blue
EL-3	63	310.5	185.5	50	70	45	G-200-63	Green
EL-4	63	310.5	185.5	100	150	90	G-200-63	Blue
EL-5	80	395.5	219.5	50	70	45	G-200-80	Green
EL-6	80	395.5	219.5	100	150	90	G-200-80	Blue

<sup>(1)</sup> other strokes under request

<sup>(2)</sup> alternative forces upon request



Pressure medium	N <sub>2</sub>	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	90 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	KIT EL
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No