


Force / Pressure

		daN	bar (20°C)
V	GREEN	23	20
Z	BLUE	45	40
R	RED	85	75
A	YELLOW	170	150

* maximum force if not specified

Max. strokes / minutes

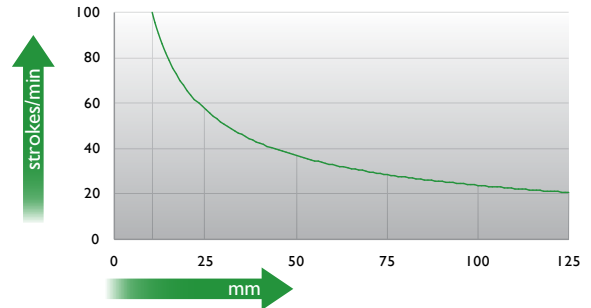

Ordering example: 4 x EHE-24-50 R

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ (20°C, 150 bar)	
				daN	F daN
EHE-24-10	10	65	55		243
EHE-24-16	16	77	61		275
EHE-24-20	20	85	65		269
EHE-24-25	25	95	70		292
EHE-24-30	30	105	75		281
EHE-24-38	38	121	83		305
EHE-24-40	40	125	85	170	289
EHE-24-50	50	145	95		313
EHE-24-60	60	165	105		314
EHE-24-70	70	185	115		315
EHE-24-80	80	205	125		315
EHE-24-100	100	245	145		316
EHE-24-125	125	295	170		317


⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	Non-repairable
Min. Charging pressure	20 bar	Max. working speed	1.6 m/s	Linkable	No

Mounting possibilities



Key

