


Force / Pressure

		daN	bar (20°C)
V	GREEN	6	20
Z	BLUE	11	40
R	RED	21	75
A	YELLOW	42	150

* maximum force if not specified

Max. strokes / minutes

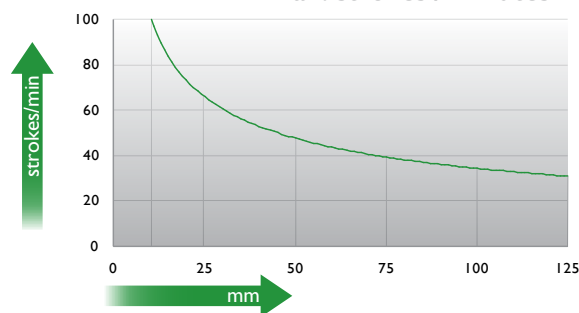

Ordering example: 4 x EHF-16-50 A

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 150 bar)	
					F daN
EHF-16-10	10	65	55		73
EHF-16-20	20	85	65		66
EHF-16-30	30	105	75		64
EHF-16-40	40	125	85		64
EHF-16-50	50	145	95	42	67
EHF-16-60	60	165	105		66
EHF-16-70	70	185	115		65
EHF-16-80	80	205	125		65
EHF-16-100	100	245	145		64
EHF-16-125	125	295	170		64



⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	150 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	Non-repairable
Min. Charging pressure	20 bar	Max. working speed	1.6 m/s	Linkable	No

Mounting possibilities



Key

