



Force / Pressure

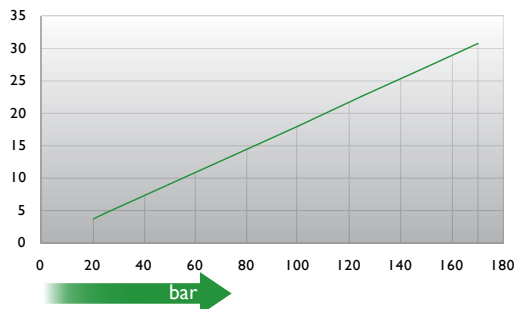

Max. strokes / minutes

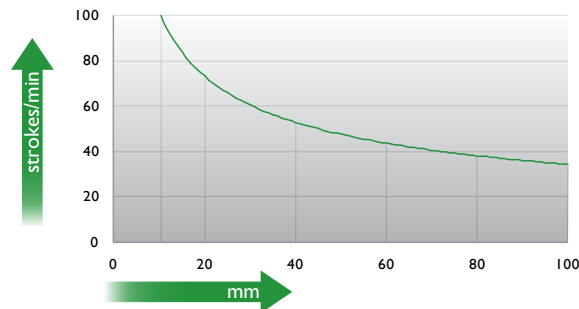

Ordering example: 4 x E-16-50

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 170 bar)	
E-16-10	10	80	70		34
E-16-20	20	100	80		35
E-16-30	30	120	90		36
E-16-40	40	140	100		36
E-16-50	50	160	110	31	36
E-16-60	60	180	120		37
E-16-70	70	200	130		37
E-16-80	80	220	140		37
E-16-100	100	260	160		38



⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	170 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	Non-repairable
Min. Charging pressure	20 bar	Max. working speed	1.6 m/s	Linkable	No

Mounting possibilities



Key

E-16-R

