


Spring Plunger with ball and internal hexagon

FINISH



FI	F2	F3	F4
Free cutting steel, blackened	Free cutting steel, blackened	Stainless steel 1.4305	Stainless steel 1.4305
Ball-bearing steel, hardened	Ball-bearing steel, hardened	Stainless steel, hardened	Stainless steel, hardened
Stainless steel, standard spring load	Stainless steel, heavy spring load	Stainless steel, standard spring load	Stainless steel, heavy spring load

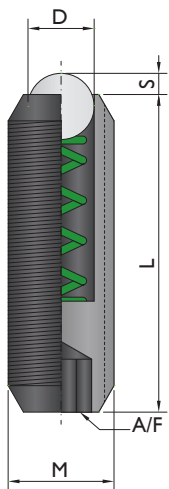

Order No.	M	S mm	D mm	L mm	A/F	F S=0 N	F Smax N
E-205-03	M 3	0.4	1.5	8	1.5	3	4.5
E-205-04	M 4	0.8	2.5	12	2	8.5	14
E-205-05	M 5	0.9	3	14	2.5	8	14
E-205-06	M 6	1	3.5	15	3	11	18
E-205-08	M 8	1.5	4.5	18	4	18	31
E-205-10	M10	2	6	23	5	24	45
E-205-12	M12	2.5	8	26	6	26	49
E-205-16	M16	3.5	10	33	8	41	86
E-205-20	M20	4.5	12	43	10	56	111
E-205-24	M24	5.5	15	48	12	81	151
E-205-05	M 5	0.9	3	14	2.5	15	22
E-205-06	M 6	1	3.5	15	3	19	28
E-205-08	M 8	1.5	4.5	18	4	36	62
E-205-10	M10	2	6	23	5	57	104
E-205-12	M12	2.5	8	26	6	61	110
E-205-16	M16	3.5	10	33	8	68	142
E-205-20	M20	4.5	12	43	10	84	166
E-205-24	M24	5.5	15	48	12	127	237
E-205-03	M 3	0.4	1.5	8	1.5	3	4.5
E-205-04	M 4	0.8	2.5	12	2	8.5	14
E-205-05	M 5	0.9	3	14	2.5	8	14
E-205-06	M 6	1	3.5	15	3	11	18
E-205-08	M 8	1.5	4.5	18	4	18	31
E-205-10	M10	2	6	23	5	24	45
E-205-12	M12	2.5	8	26	6	26	49
E-205-16	M16	3.5	10	33	8	41	86
E-205-20	M20	4.5	12	43	10	56	111
E-205-24	M24	5.5	15	48	12	81	151
E-205-05	M 5	0.9	3	14	2.5	15	22
E-205-06	M 6	1	3.5	15	3	19	28
E-205-08	M 8	1.5	4.5	18	4	36	62
E-205-10	M10	2	6	23	5	57	104
E-205-12	M12	2.5	8	26	6	61	110
E-205-16	M16	3.5	10	33	8	68	142
E-205-20	M20	4.5	12	43	10	84	166
E-205-24	M24	5.5	15	48	12	127	237

Ordering example: 4 x E-205-03-F3