


## Spring Plunger with pin and internal hexagon

FINISH



FI	F2	F3	F4
Free cutting steel, blackened	Free cutting steel, blackened	Stainless steel 1.4305	Stainless steel 1.4305
Free cutting steel, hardened, blackened	Free cutting steel, hardened, blackened	Stainless steel 1.4305	Stainless steel 1.4305
Stainless steel, standard spring load	Stainless steel, heavy spring load	Stainless steel, standard spring load	Stainless steel, heavy spring load

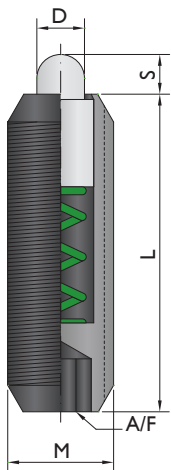

Order No.	M	S mm	D mm	L mm	A/F	F S=0 N	F Smax N
E-207-04	M 4	1.5	1.8	12	2	4.5	12.5
E-207-05	M 5	2	2.4	14	2.5	5	13
E-207-06	M 6	2	2.7	15	3	6	17
E-207-08	M 8	2	3.8	18	4	16	33
E-207-10	M10	2.5	4.5	23	5	19	42
E-207-12	M12	3.5	6.2	26	6	22	57
E-207-16	M16	4.5	8.5	33	8	38	78
E-207-20	M20	6.5	10	43	10	39	81
E-207-24	M24	8	13	48	12	72	155
E-207-06	M 6	2	2.7	15	3	11	25
E-207-08	M 8	2	3.8	18	4	23	59
E-207-10	M10	2.5	4.5	23	5	20	54
E-207-12	M12	3.5	6.2	26	6	38	96
E-207-16	M16	4.5	8.5	33	8	50	100
E-207-20	M20	6.5	10	43	10	52	133
E-207-24	M24	8	13	48	12	91	223
E-207-04	M 4	1.5	1.8	12	2	4.5	12.5
E-207-05	M 5	2	2.4	14	2.5	5	13
E-207-06	M 6	2	2.7	15	3	6	17
E-207-08	M 8	2	3.8	18	4	16	33
E-207-10	M10	2.5	4.5	23	5	19	42
E-207-12	M12	3.5	6.2	26	6	22	57
E-207-16	M16	4.5	8.5	33	8	38	78
E-207-20	M20	6.5	10	43	10	39	81
E-207-24	M24	8	13	48	12	72	155
E-207-06	M 6	2	2.7	15	3	11	25
E-207-08	M 8	2	3.8	18	4	23	59
E-207-10	M10	2.5	4.5	23	5	20	54
E-207-12	M12	3.5	6.2	26	6	38	96
E-207-16	M16	4.5	8.5	33	8	50	100
E-207-20	M20	6.5	10	43	10	52	133
E-207-24	M24	8	13	48	12	91	223

Ordering example: 4 x E-207-06-F3