



Spring Plunger with internal hexagon and seal

FINISH



	F1	F2	F3
	Free cutting steel, blackened	Free cutting steel, blackened	Stainless steel 1.4305
	Free cutting steel, hardened, blackened	Free cutting steel, hardened, blackened	Stainless steel 1.4305
	Stainless steel, standard spring load	Stainless steel, heavy spring load	Stainless steel, standard spring load

Order No.	M	S mm	D mm	L mm	A/F	N mm	T mm	F S=0 N	F Smax N
E-209-08	M 8	3	3.8	26	2.5	1.5	1.4	9	24
E-209-10	M10	3.5	4	28	3	1.5	1.4	15	30
E-209-12	M12	4	6	35	4	2.7	2	24	50
E-209-16	M16	5	7.5	40	5	3.2	2.5	36	58
E-209-08	M 8	3	3.8	26	2.5	1.5	1.4	17	39
E-209-10	M10	3.5	4	28	3	1.5	1.4	22	43
E-209-12	M12	4	6	35	4	2.7	2	40	80
E-209-16	M16	5	7.5	40	5	3.2	2.5	44	113
E-209-08	M 8	3	3.8	26	2.5	1.5	1.4	9	24
E-209-10	M10	3.5	4	28	3	1.5	1.4	15	30
E-209-12	M12	4	6	35	4	2.7	2	24	50
E-209-16	M16	5	7.5	40	5	3.2	2.5	36	58

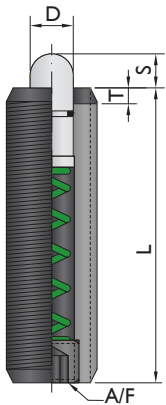

Ordering example: 4 x E-209-08-F3