

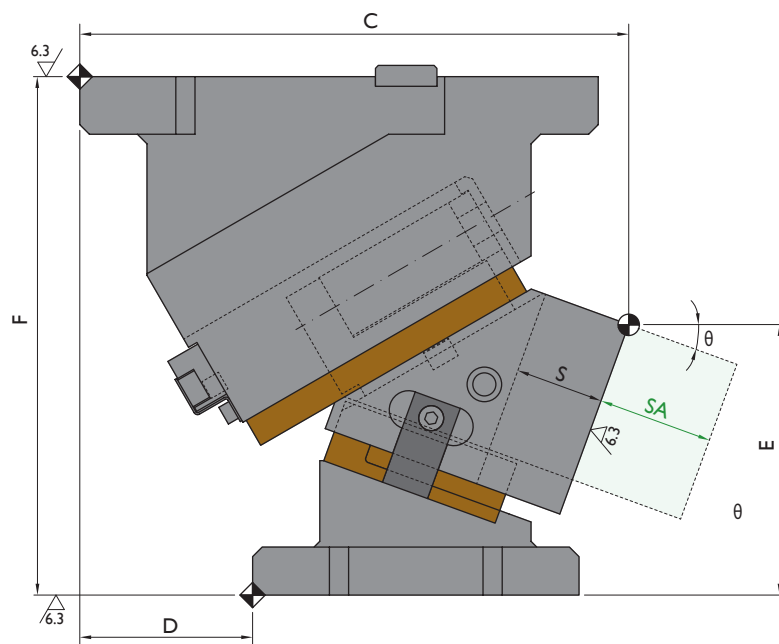




WEB

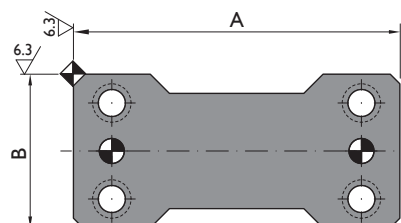

CAD

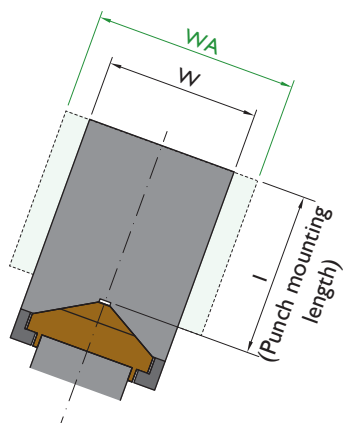

CAM DIAGRAM

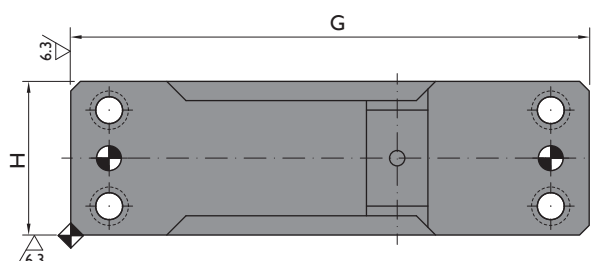

Available Options

		SA	WA	TAK	P	
					Standards	Options
CACC	50	SA1 - SA2 - ... - SA60	WA65	-	Ø13 H7	P12 (Ø12 H7)
CACC	65	SA1 - SA2 - ... - SA60	-	-	Ø10 H7	-
CACC	80	SA1 - SA2 - ... - SA60	WA100 / WA120	-	Ø13 H7	P16 (Ø16 H7)
CACC	150	-	-	TAK	Ø13 H7	P16 (Ø16 H7)

Ordering example: CACC-W-θ-SA-WA-TAK-P

CACC-80-20

(Standard dimensions)

CACC-80-20-SA57-WA100

(Additional slider length (57 mm) and additional mounting width (100 mm))

Order No.			Main Features						General Dimensions									
Model	W mm	θ °	S mm	Working Force tnf		Weight kg	Spring Force kgf	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Ss mm	α °
CACC 50 00	50	00	30.2	2	4	12.7	280	150	50	225	107	122.5	200	240	50	75	47	50
CACC 50 05	50	05	30.5	2	4	12.3	280	150	50	226.91	100	121.67	200	240	50	75	43	50
CACC 50 10	50	10	30.3	2	4	11.8	280	150	50	223.72	90	120.07	200	240	50	75	39	50
CACC 50 15	50	15	30.5	2	4	11.8	280	150	50	224.36	85	117.71	200	240	50	75	36	50
CACC 50 20	50	20	30.4	2	4	11.5	280	150	50	220.76	70	114.61	200	240	50	75	33	50
CACC 50 25	50	25	30	2	4	11.3	280	150	50	215.85	58	110.78	200	240	50	75	30	50
CACC 50 30	50	30	32.6	2	4	11.1	280	150	50	213.58	55	105.27	200	240	50	75	30	50
CACC 50 35	50	35	35.4	2	4	10.9	280	150	50	204.89	35	103.1	200	240	50	75	30	50
CACC 50 40	50	40	38.6	2	4	10.9	280	150	50	206.72	30	97.31	200	240	50	75	30	50
CACC 50 45	50	45	42.3	2	4	10.6	280	150	50	202.01	20	96.94	200	240	50	75	30	50
CACC 50 50	50	50	46.7	2	4	10.6	280	150	50	195.73	10	94.06	200	240	50	75	30	50
CACC 50 55	50	55	52.1	2	4	10.8	280	150	50	189.83	0	83.7	200	240	50	65	30	50
CACC 50 60	50	60	59.1	2	4	11.2	280	150	50	179.27	-15	74.92	200	240	50	65	30	50
CACC 50 65	50	65	58.3	2	4	11.6	280	150	50	176.6	-32	73.13	200	240	50	75	25	55
CACC 50 70	50	70	57.6	2	4	12	280	150	50	177	-38	64.17	200	240	50	75	20	60
CACC 65 00	65	00	15	2	4	9.5	280	130	65	170	60	127	180	170	65	65	21.2	45
CACC 65 05	65	05	15.1	2	4	9.3	280	130	65	171.41	55	119.73	180	170	65	65	19.6	45
CACC 65 10	65	10	15.2	2	4	9	280	130	65	177.16	55	116.94	180	170	65	65	18.3	45
CACC 65 15	65	15	15.5	2	4	8.8	280	130	65	177.2	50	113.67	180	170	65	65	17.3	45
CACC 65 20	65	20	16.5	2	4	8.6	280	130	65	176.51	40	109.99	180	170	65	65	17.1	45
CACC 65 25	65	25	17.1	2	4	8.5	280	130	65	172.94	35	104.36	180	170	65	65	17.1	50
CACC 65 30	65	30	18.5	2	4	8.3	280	130	65	177.78	30	101.68	180	170	65	65	16.6	45
CACC 65 35	65	35	19.6	2	4	8.3	280	130	65	173.29	20	96.75	180	170	65	65	16.6	50
CACC 65 40	65	40	21.5	2	4	8.1	280	130	65	170.78	10	97.56	180	170	65	65	16.5	45
CACC 65 45	65	45	23.3	2	4	8.1	280	130	65	165.5	2.5	93.49	180	170	65	65	16.5	50
CACC 65 50	65	50	26.5	2	4	8.4	280	130	65	165.41	-5	93.21	190	170	65	65	17.1	45
CACC 65 55	65	55	29.7	2	4	8.4	280	130	65	159.51	-10	90.11	190	170	65	65	17.1	50
CACC 65 60	65	60	35	2	4	9.3	280	130	65	156.68	-20	89.22	210	170	65	65	18.1	45
CACC 65 65	65	65	41.4	2	4	9.3	280	130	65	150.33	-25	87.2	210	170	65	65	18.1	50
CACC 65 70	65	70	51.1	2	4	9.5	280	130	65	146.45	-32	78.32	210	170	65	65	18.1	55
CACC 80 00	80	00	32.1	4	8	25.9	560	165	80	260	100	171	270	270	80	86	50	50
CACC 80 05	80	05	38.4	4	8	26.3	560	165	80	272.93	100	160.61	270	270	80	86	50	45
CACC 80 10	80	10	38.9	4	8	26.6	560	165	80	279.92	100	149.57	270	270	80	86	50	50
CACC 80 15	80	15	39.7	4	8	25.1	560	165	80	285.93	100	137.96	270	270	80	86	50	55
CACC 80 20	80	20	46.1	4	8	25.3	560	165	80	285.9	90	140.88	270	270	80	86	50	50
CACC 80 25	80	25	47.8	4	8	25.3	560	165	80	289.8	90	128.4	270	270	80	86	50	55
CACC 80 30	80	30	54.3	4	8	23.2	560	165	80	282.59	75	135.64	270	270	80	86	50	50
CACC 80 35	80	35	57.4	4	8	23.4	560	165	80	284.27	75	122.68	270	270	80	86	50	55
CACC 80 40	80	40	64.3	4	8	22.4	560	165	80	274.8	60	129.62	270	270	80	86	50	50
CACC 80 45	80	45	69.6	4	8	22.4	560	165	80	274.2	60	116.56	270	270	80	86	50	55
CACC 80 50	80	50	77.8	4	8	21.6	560	165	80	262.46	35	118.61	270	270	80	86	50	50
CACC 80 55	80	55	87.2	4	8	21.7	560	165	80	259.6	35	105.86	270	270	80	86	50	55
CACC 80 60	80	60	98.5	4	8	23.2	560	165	80	240.64	0	93.41	270	270	80	86	50	50
CACC 80 65	80	65	81.6	4	8	23.7	550	165	80	235.61	-5	81.35	270	270	80	86	35	55
CACC 80 70	80	70	86.4	4	8	23.9	550	165	80	227.83	-10	74.47	270	270	80	86	30	60

Order No.			Main Features						General Dimensions									
Model	W mm	θ °	S mm	Working Force tnf		Weight kg	Spring Force kgf	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Ss mm	α °
				1,000,000 strokes	300,000 strokes													
CACC	150	00	32.1	9	14	45.4	1100	150	150	280	120	185	270	280	150	85	50	50
CACC	150	05	32.3	9	14	45.9	1100	150	150	288.26	115	174.16	270	280	150	85	50	55
CACC	150	10	38.9	9	14	44.4	1100	150	150	285.54	105	167.64	270	280	150	85	50	50
CACC	150	15	39.7	9	14	44.9	1100	150	150	291.79	105	155.53	270	280	150	85	50	55
CACC	150	20	46.1	9	14	43.2	1100	150	150	286.97	90	147.93	270	280	150	85	50	50
CACC	150	25	47.8	9	14	43.7	1100	150	150	291.02	90	134.92	270	280	150	85	50	55
CACC	150	30	54.3	9	14	42.2	1100	150	150	283.92	70	131.6	270	280	150	85	50	50
CACC	150	35	57.4	9	14	42.7	1100	150	150	285.66	70	118.09	270	280	150	85	50	55
CACC	150	40	64.3	9	14	41	1100	150	150	276.2	45	114.47	270	280	150	85	50	50
CACC	150	45	69.6	9	14	41.4	1100	150	150	275.56	45	100.86	270	280	150	85	50	55
CACC	150	50	77.8	9	14	40.5	1100	150	150	263.74	25	102.35	270	280	150	85	50	50
CACC	150	55	87.2	9	14	40.9	1100	150	150	260.74	25	89.06	270	280	150	85	50	55
CACC	150	60	98.5	9	14	41.5	1100	150	150	246.6	0	76.08	270	280	150	85	50	50
CACC	150	65	93.2	9	14	42.2	1100	150	150	241.35	0	63.51	270	280	150	85	40	55
CACC	150	70	86.4	9	14	43.5	1100	150	150	240.01	-5	51.44	270	280	150	85	30	60