


NITROGAS

GUIDE RAIL LIFTERS



NITROGAS is a global company that has a worldwide presence through its own network of subsidiaries and an extensive distributor network.

SUBSIDIARIES

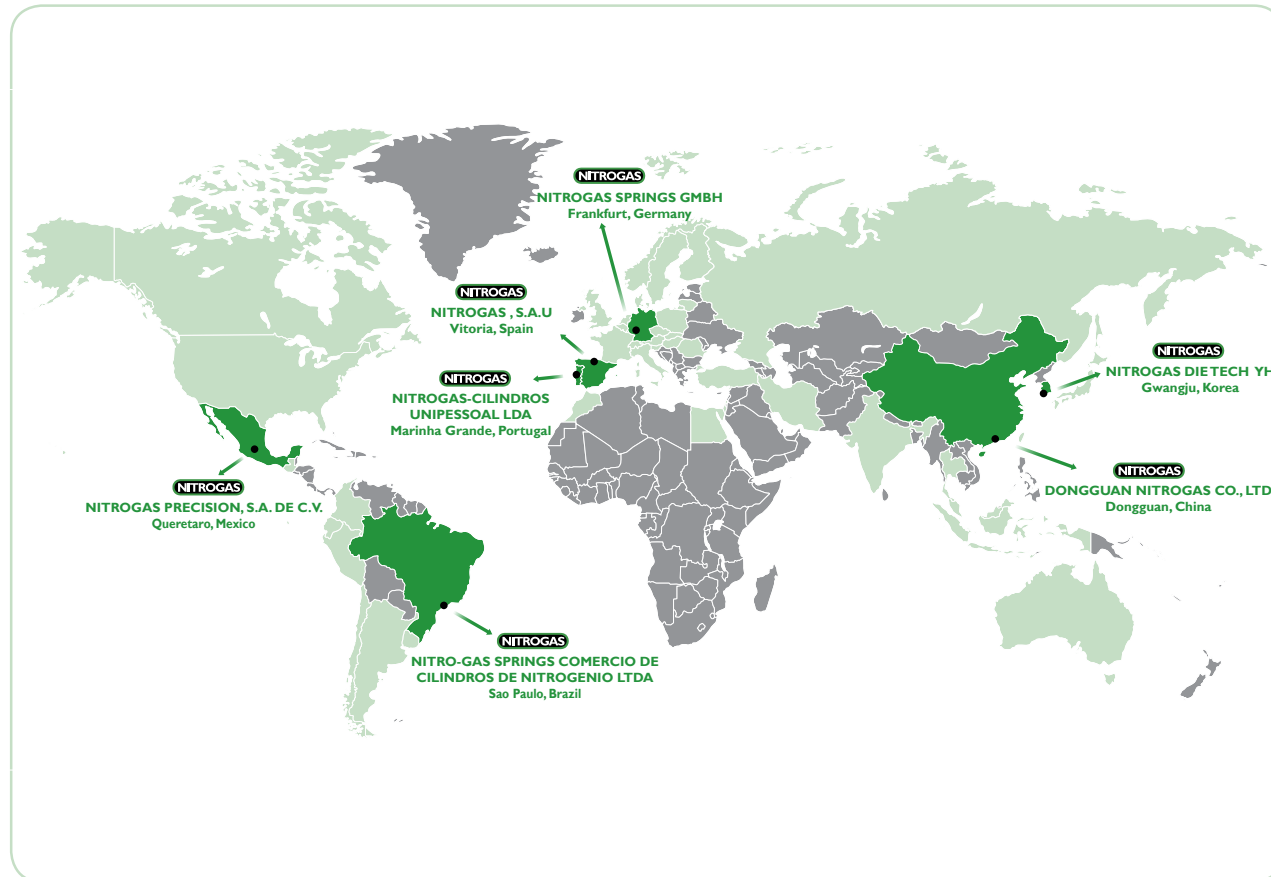

DISTRIBUTORS

WESTERN EUROPE

Austria
Denmark
Finland
France
Germany
Italy
Netherlands
Norway
Portugal
Spain
Sweden
Switzerland
United Kingdom

EASTERN EUROPE

Slovakia
Slovenia
Lithuania
Romania
Russia
Hungary
Czech Republic
Poland
Turkey

AMERICA

Argentina
Brazil
Canada
Chile
Colombia
Ecuador
Guatemala
Mexico
Peru
Uruguay
USA

ASIA-OCEANIA

Australia
China
India
Indonesia
Iran
Israel
Japan
Korea
Malaysia
Russia
Taiwan
Thailand

AFRICA


Morocco
South Africa

Our customers can learn more about the nearest contact on our website:

www.nitrogas.com/es/Worldwide.aspx


Conventional mounting

(Guide Pillar + Gas Spring + Retainer screw)

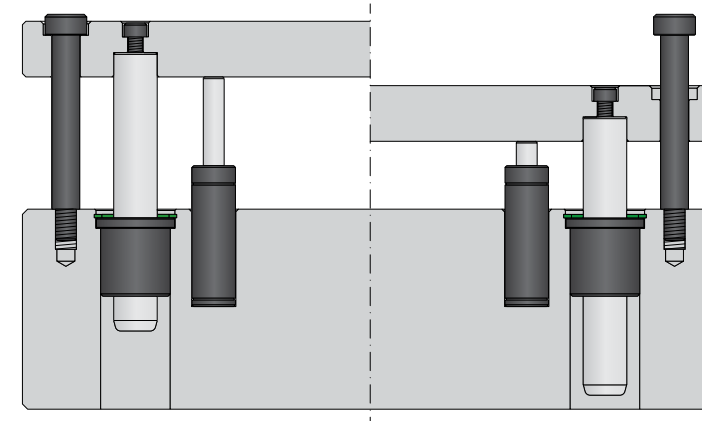

Guide Pillar - Gas Spring + Retainer screw


(EL + Retainer screw)

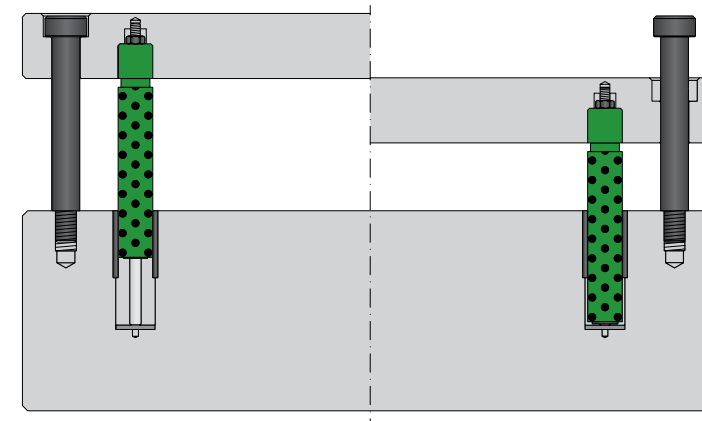


MODEL	PAGE
EL	2

Guide Pillar - Retainer - Gas Spring


(CL-100, CL-200)

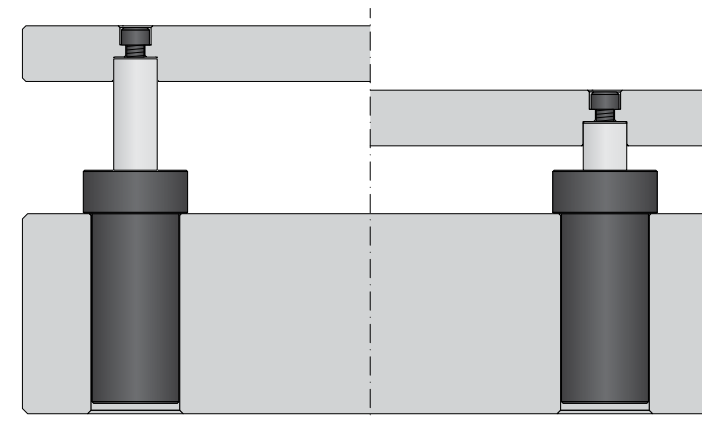

MODEL	PAGE
CL-100	3
CL-200	4

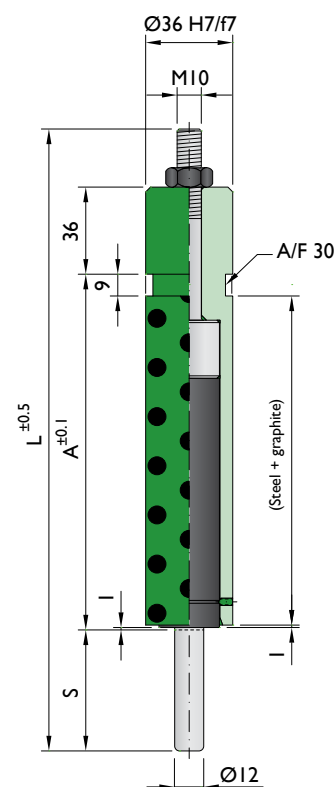

Mounting example

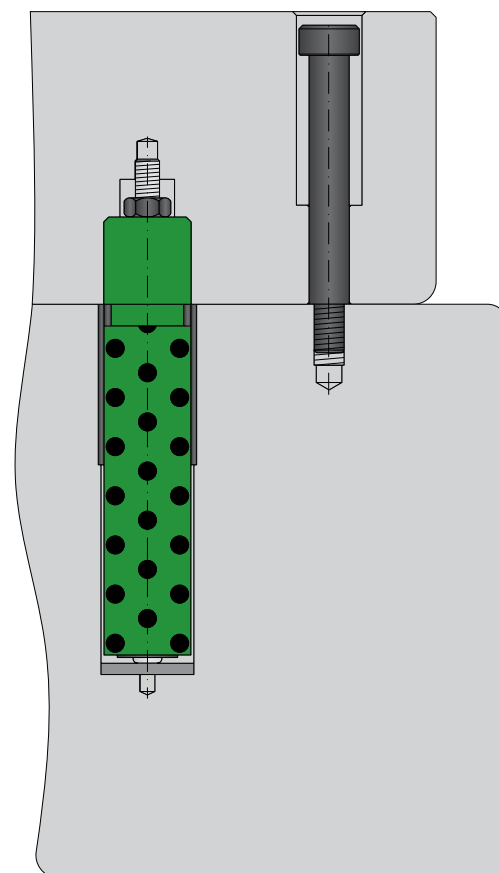

Ordering example: 4 x EL-5



Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN	F daN	P (20°C) bar	Gas Spring	Colour
EL-1	50	257	147	50	70	45	G-200-50	Green
EL-2	50	257	147	100	140	90	G-200-50	Blue
EL-3	63	310.5	185.5	50	70	45	G-200-63	Green
EL-4	63	310.5	185.5	100	150	90	G-200-63	Blue
EL-5	80	395.5	219.5	50	70	45	G-200-80	Green
EL-6	80	395.5	219.5	100	150	90	G-200-80	Blue

⁽¹⁾ other strokes under request


⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	90 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	KIT EL
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No

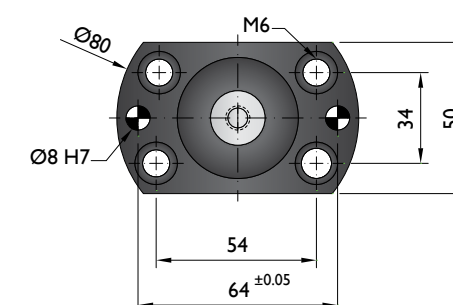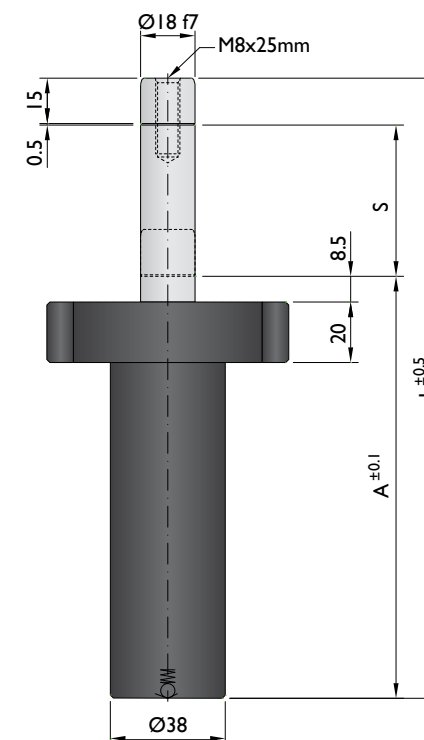

Mounting example

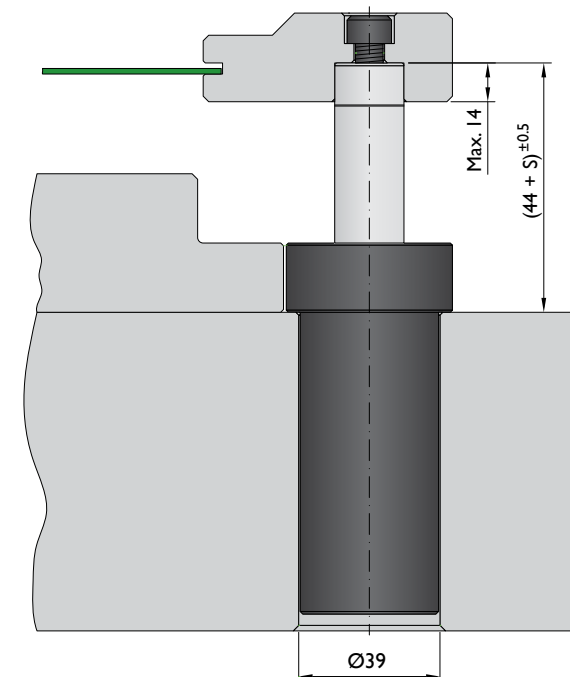

Ordering example: 4 x CL-100-50


Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN	F daN
CL-100-25	25	135	94.5		150
CL-100-50	50	185	119.5		160
CL-100-63	63	211	132.5	100	160
CL-100-80	80	245	149.5		170
CL-100-125	125	335	194.5		180

⁽¹⁾ other strokes under request


⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	40 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	KIT CL-100
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No

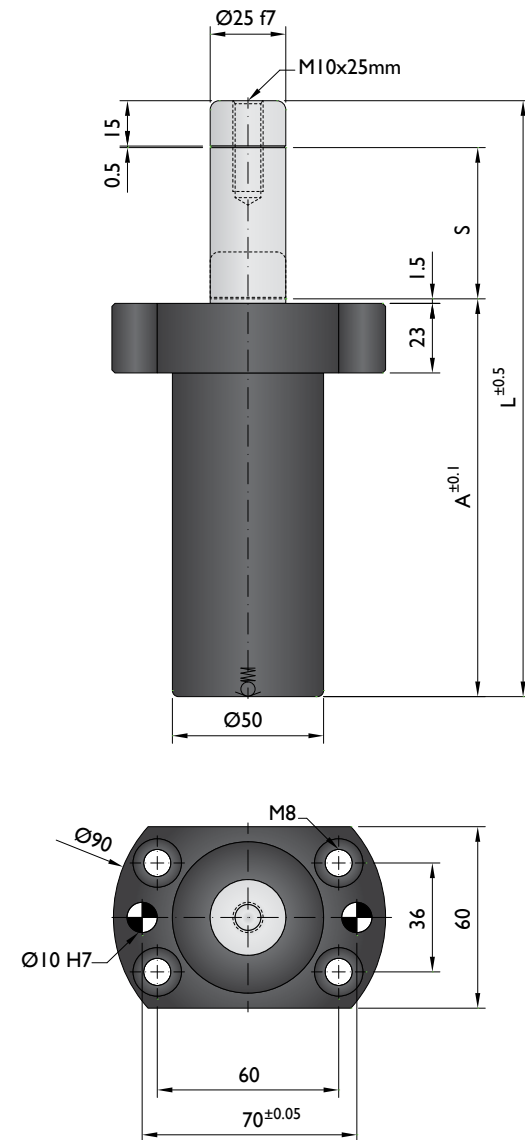

Mounting example

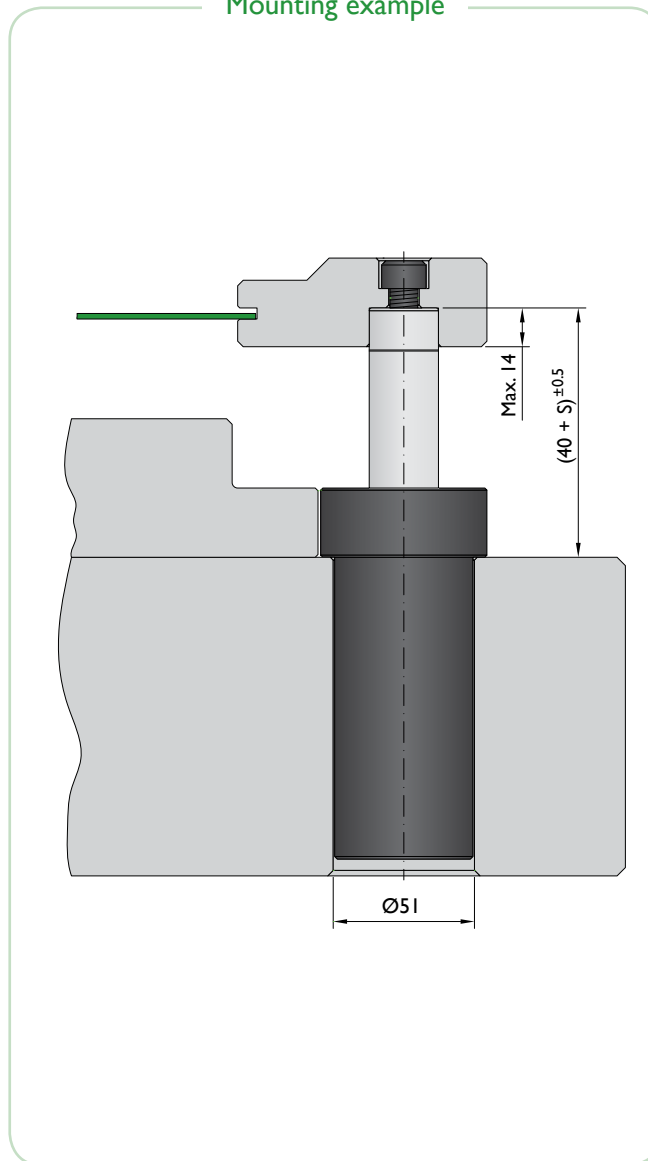

Ordering example: 4 x CL-200-50

Order No.	S ⁽¹⁾ mm	L mm	A mm	F ₀ ⁽²⁾ daN (20°C, 40 bar)	F daN
CL-200-25	25	147	106.5	200	320
CL-200-50	50	197	131.5		340
CL-200-63	63	223	144.5		340
CL-200-80	80	257	161.5		350
CL-200-125	125	347	206.5		360
CL-200-160	160	417	241.5		360

⁽¹⁾ other strokes under request

⁽²⁾ alternative forces upon request



Pressure medium	N ₂	Working temperature	0-80°C	Min. security stroke	10%
Max. Charging pressure	40 bar	Temperatura related force increase	+0.34%/°C	Repair Kit	KIT CL-200
Min. Charging pressure	25 bar	Max. working speed	1.6 m/s	Linkable	No



CAD files of the product can be downloaded for FREE from our website:
<http://www.nitrogas.com/es/Downloads.aspx>



Commercial

comercial@nitrogas.com



Training

training@nitrogas.com



Engineering

engineering@nitrogas.com



Maintenance

maintenance@nitrogas.com



Contact hours

NITROGAS offers 24 hs contact service.

NITROGAS



nitrogas@nitrogas.com
www.nitrogas.com

NITROGAS

This catalogue cancels and replaces any previous one. NITROGAS reserves the right to make modifications without notice.
CATGRL14CEN. Last version available on www.nitrogas.com